


COMPONENTS	Cast Iron	Ductile Iron	Cast Steel	Stainless Steel
Body	EN-GJL250 (GG25)	EN-GJS400-18-LT (GGG40.3)	GP240GH (GSC25)	AISI 316 (1.4408)
Cover	EN-GJL250 (GG25)	EN-GJS400-18-LT (GGG40.3)	GP240GH (GSC25)	AISI 316 (1.4408)
Basket	AISI316 (1.4401)	AISI316 (1.4401)	AISI316 (1.4401)	AISI 316 (1.4401)
Cover sealing	NBR	NBR	NBR	NBR
Stud bolts, nuts	Steel	Steel	Steel	A4 (AISI 316)
Drain plug	Brass	Brass	Brass	AISI 316 (1.4401)

Dimensions

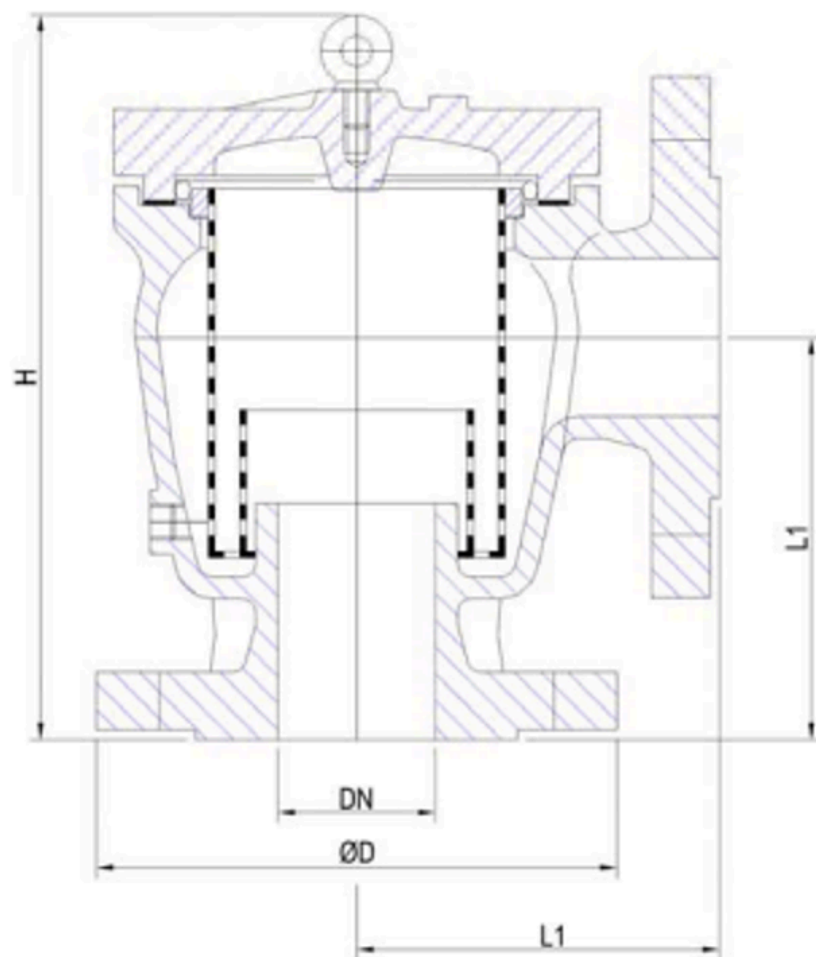

DN [mm]	Pressure rating	ØD		L1 [mm]	H [mm]	Weight [kg]
		PN 10	PN 16			
25	PN 4	115	115	100	195	5.0
32	PN 4	140	140	105	235	7.0
40	PN 4	150	150	125	235	12
50	PN 4	165	165	135	255	15
65	PN 4	185	185	150	270	20
80	PN 4	200	200	175	320	30
100	PN 4	220	220	195	345	38
125	PN 4	250	250	220	410	62
150	PN 4	285	285	270	470	87
175	PN 4	315	315	300	535	120
200	PN 4	340	340	300	535	125
250	PN 4	395	405	390	650	165
300	PN 4	445	460	450	800	245
350	PN 4	505	520	400	735	250
400	PN 4	565	580	420+520	940	380
450	PN 4	615	640	625	1050	530
500	PN 2.5	670	715	675	1130	590
600	PN 2.5	780	840	620+720	1225	850